

H-900 - H-900HP SERIES PRESSURE RELIEF VALVES




H-900 - H-900HP FEATURES

- Angle pressure safety valve
 - H-900 is available as CE/PED products
 - 316 St.St. Construction
 - Service 10-225 psi
- MAWP* 300 psi
 - One spring for all set pressure range
 - Available in all pipe threads and LET-LOK® connectors
 - Sizes: 1/4" or 6mm

* Maximum Allowed Working Pressure.

GENERAL


The H-900 series is a relief valve for low pressure service. The valve is normally closed. It will open when the system pressure reaches the set level. It will re-close when the system pressure falls below the set level.

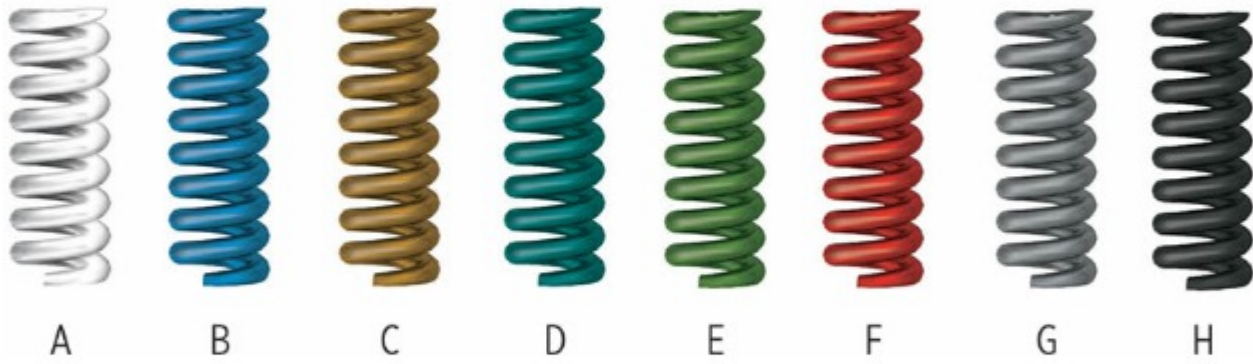

PRESSURE - TEMPERATURE RATING

NOMINAL CRACKING PRESSURE RANGE			
psig	Bar	Spring Designator	Color
50-350	3.4 - 24	A	White
350-750	24 - 51.5	B	Blue
750-1500	51.5 - 103	C	Gold
1500-2250	103 - 155	D	Turquoise
2250-3000	155 - 206	E	Green
3000-4000	206 - 275	F	Red
4000-5000	275 - 344	G	Silver
5000-6000	344 - 413	H	Black

H-900 - H-900HP SERIES ORDERING INFORMATION

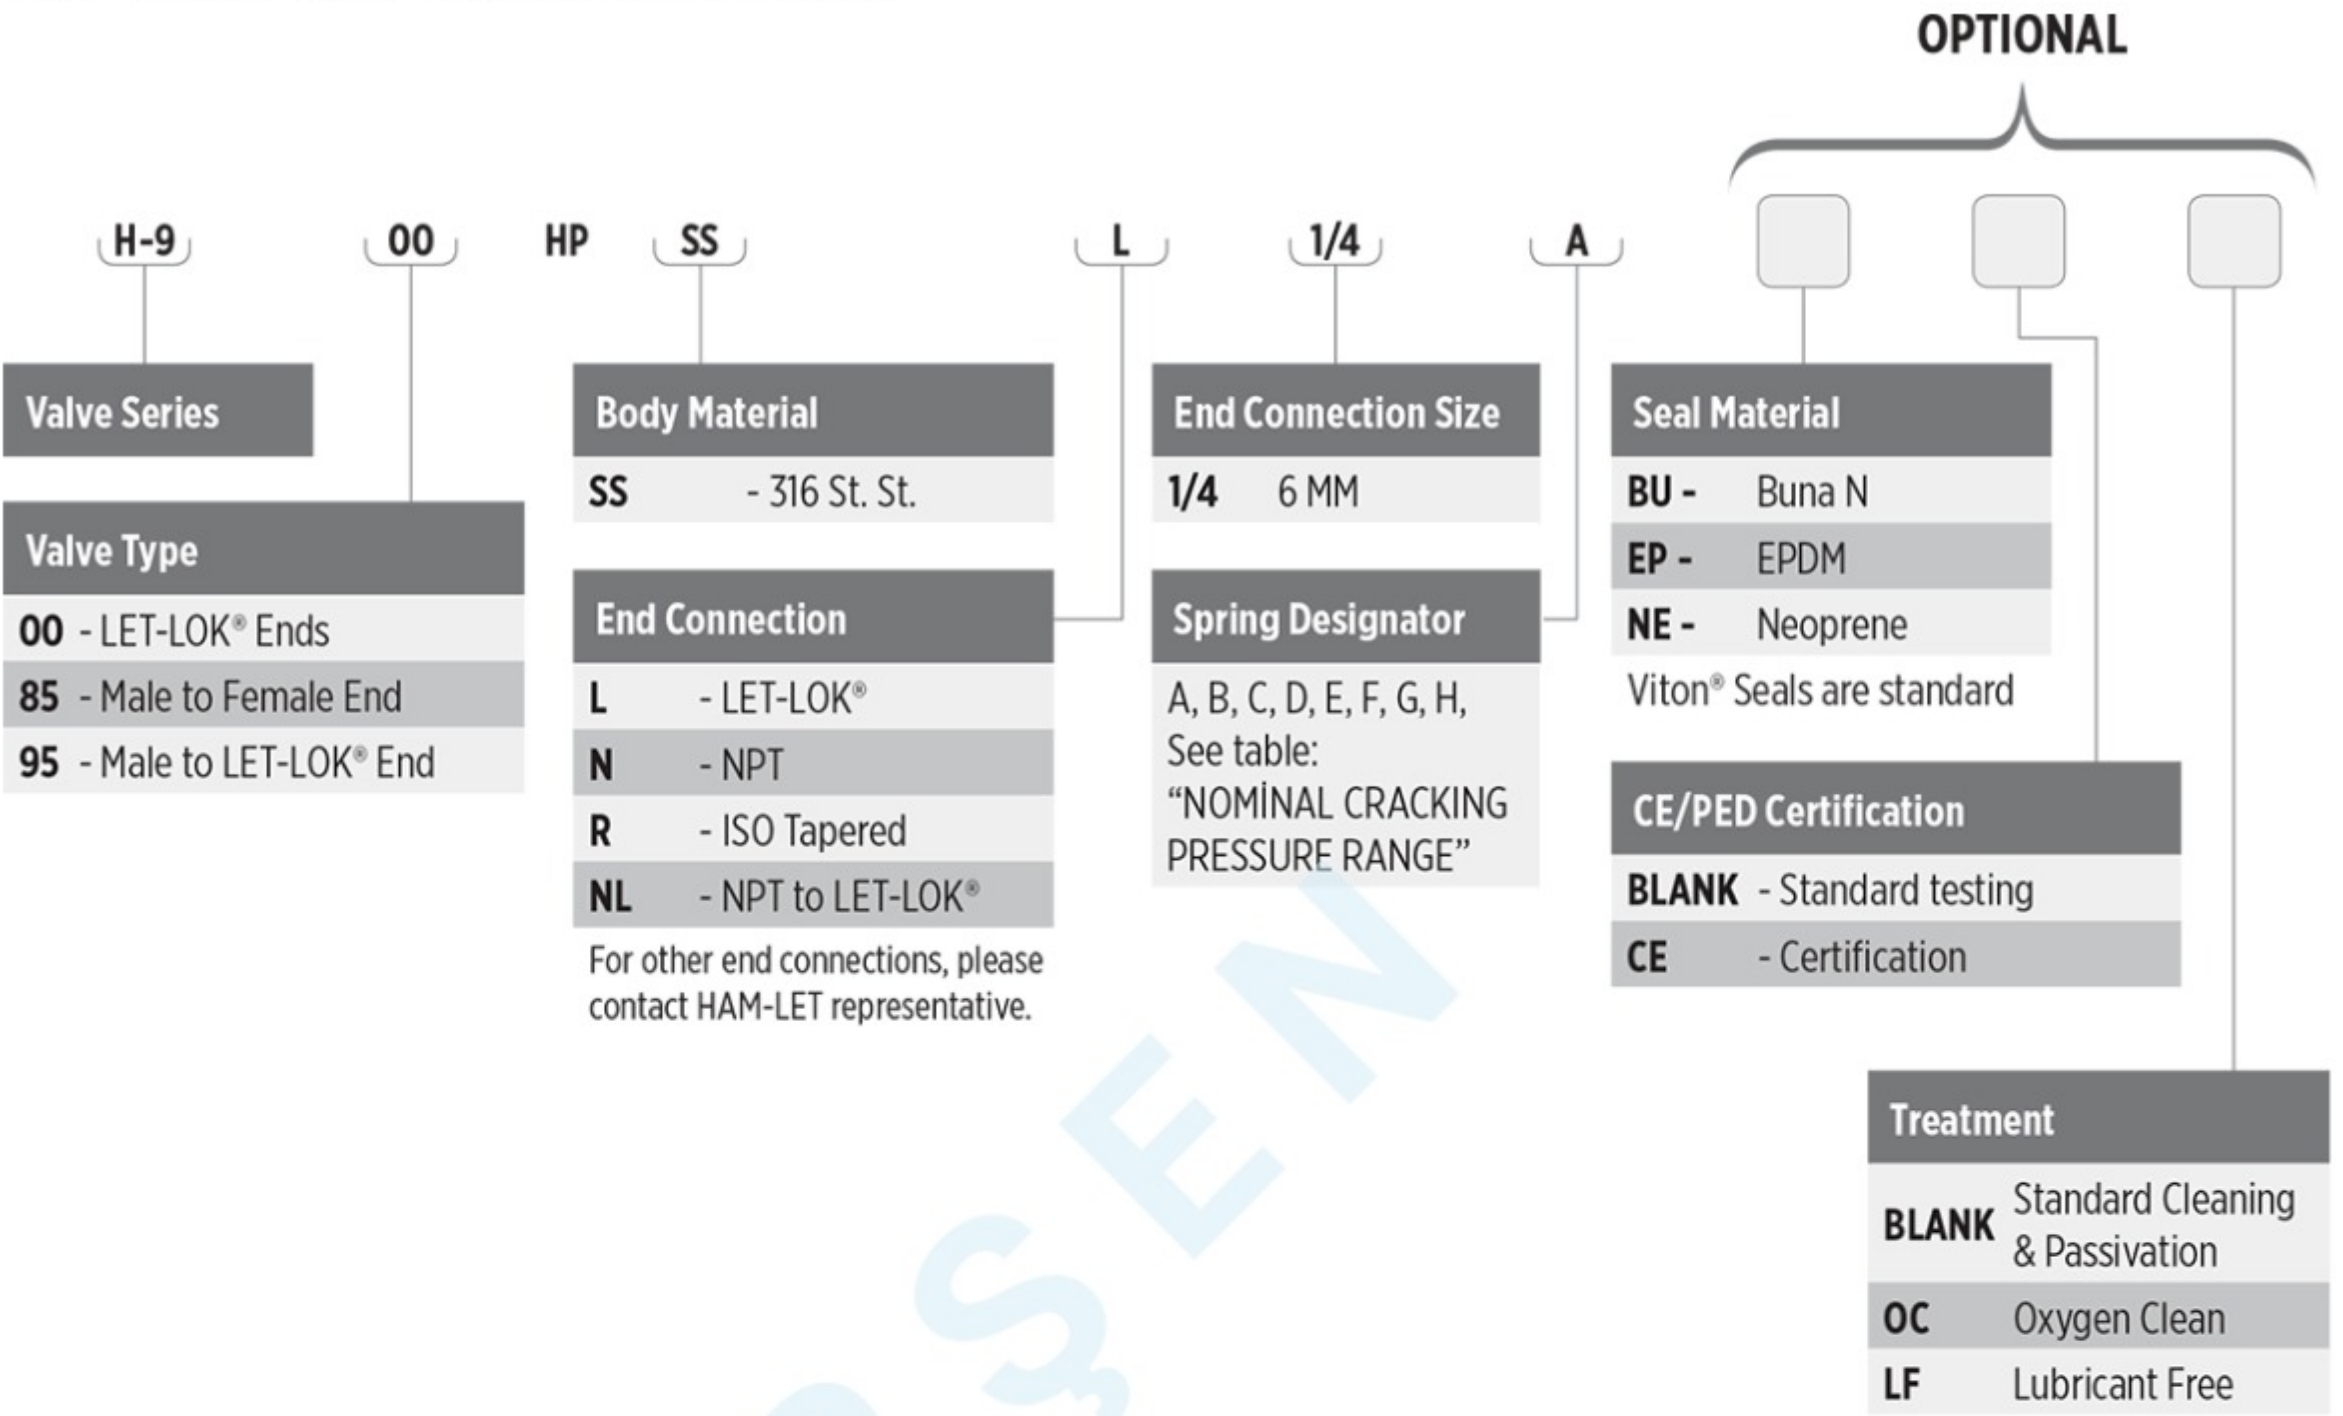

SPRING KIT

Includes: Spring (specific to desired set pressure range) and label.

Z 900 HP SPK 1/4

Body Designator per End Connections

1/4 For all end connections

A

Spring Designator

A, B, C, D, E, F, G, H, See table above

SEAL KIT

Includes: O-Rings and label.

Z 900 HP SK 1/4

Body Designator per End Connections

1/4 For all end connections

VI

Seal Material

VI - Lever Handle

BU - Oval Handle

EP - EPDM

NE - Neoprene

Warning!
The system designer and user have the sole responsibility for selecting products suitable for their special application requirements, ensuring their safe and trouble-free installation, operation, and maintenance. Application details, material compatibility and product ratings should all be considered for each selected product. Improper selection, installation or use of products can cause property damage or personal injury.